




Window Film

Tough 3-layer CoEx (Co-Extruded) PE masking film provides up to 60-days UV resistance on glass, metal or other smooth surfaces. LDPE/LLDPE Polyethylene blend contains high strength Metallocene for improved puncture resistance. Water based acrylic adhesive system is safe to use, designed to maintain tack level and provide a clean and easy removal from most surfaces. Window film is available in blue. Surfaces to which window film is applied should be clean, dry and free of grease, oil or other contaminants. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

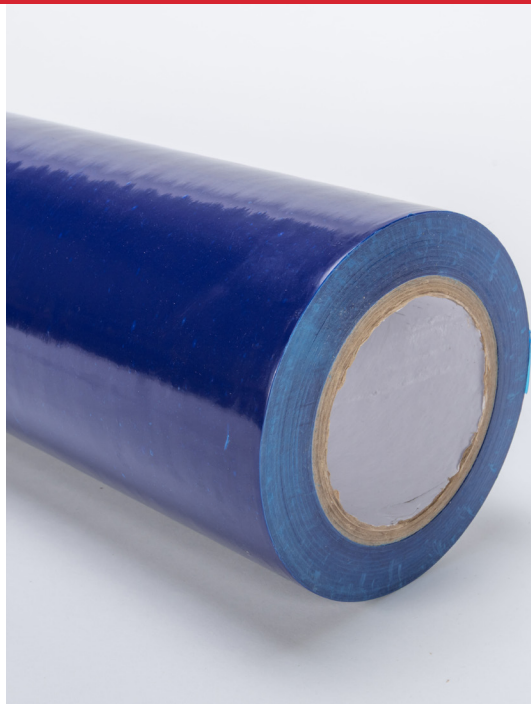

SKU	DESCRIPTION	SIZE	COLOR	PALLET QTY
WF24600B	WINDOW FILM	24" X 600'	BLUE	90

KEY FEATURES

- 3-Layer CoEx LDPE/LLDPE Blend
- Blue Color
- 60 Days UV Resistance

ADHESIVE

- Type: Acrylic Copolymer
- Base: Water
- Chemical Activity: Inert

SPECS

Properties	Test	Result
Thickness	ASTM D-1000	1.5 mil
Puncture Resistance	Dart D1709	120 g
Tensile Strength	D882 (MD)	> 1,800 PSI
Elongation at Break	D882 (MD)	350%
Adhesion Properties	PSTC-1 Metal	4-6 oz/in

